

NAIL STRIP


ITEM	SALES PACKAGE	WEIGHT	NAIL LENGTH
KHB C6-20_PO	500 pcs	0,71 g	20 mm
KHB C6-25_PO	500 pcs	0,78 g	25 mm
KHB C6-30_PO	500 pcs	0,88 g	30 mm
KHB C6-35_PO	500 pcs	1,30 g	35 mm
KHB C6-40_PO	500 pcs	1,46 g	40 mm
KHO HC6-15_PO	500 pcs	0,66 g	15 mm
KHO HC6-17_PO	500 pcs	0,71 g	17 mm
KHO HC6-22_PO	500 pcs	0,84 g	22 mm
KHO HC6-27_PO	500 pcs	1,00 g	27 mm
KHO HC6-32_PO	500 pcs	1,15 g	32 mm
KHO HC6-15FH_PO	500 ks	0,65 g	15 mm
KHO HC6-17FH_PO	500 ks	0,71 g	17 mm
KHO HC6-22FH_PO	500 ks	0,84 g	22 mm
KHO HC6-27FH_PO	500 ks	0,99 g	27 mm

HB- black nail strip- for standard concrete, solid masonry, brick, plaster and wood
 KHO- orange nail strip- for high strength concrete, prestressed concrete, steel
 KHO (FH)- grey nail strip- no plastic residue under the nail head, concrete, steel

CABLE CLAMPS

ITEM	HEIGHT	Ø CABLE	SHEET THICKNESS
6706_POBD	7,2 mm	4 mm	1,2 mm
6708_POBD	9,2 mm	6 mm	1,2 mm
6710_POBD	11,2 mm	8 mm	1,2 mm
6712_POBD	13,2 mm	10 mm	1,2 mm
6714_POBD	15,2 mm	12 mm	1,2 mm
6716E_POBD	17,2 mm	14 mm	1,5 mm
6718_POBD	19,5 mm	16 mm	1,5 mm
6720_POBD	21,5 mm	18 mm	1,5 mm
6722_POBD	23,5 mm	20 mm	1,5 mm
6725_POBD	26,5 mm	23 mm	1,5 mm

The maximum cable clamps distance for the standard route is 300 mm, for non-standard 600 mm.



NAILING

KOPOS KOLÍN a.s.
 Havlíčkova 432
 280 02 Kolín

+420 321 730 111
 kopus@kopos.cz

www.kopos.com



NAILGUN

K-Pulsa 40 E_PO

Our best gas-powered nailgun provides customers with maximum comfort when nailing fire-resistant clamps. Its compact and sleek design is ideal for working near corners and in tighter spaces. The nail set is always supplied complete with gas cartridges, nail strip is halogen-free. Cerification in fireproofing according to DIN 4102-12 for 90 minutes.



PRODUCT VIDEO



NAILS STRIP

MISCELLANEOUS TYPES

- nail lengths 15, 17, 20, 22, 25, 27, 30, 32, 35 and 40 mm
- for standard concrete, solid masonry, bricks, high strength concrete, prestressed concrete and steel
- sales package 500 pcs with gas cartridge



MAGNETIC ATTACHMENT

MVH P800_PO

- 67xx_POBD clamp series nailing
- strong magnet for fixing clamps without hole

THE LOW CONTACT FORCE IS PARTICULARLY APPRECIATED WHEN WORKING OVERHEAD

NAILS GUIDING

NAILGUN CERTIFICATES:

EN 12549


EN ISO 11148-13

WEIGHT OF THE NAILGUN 3.7 KG

HEDGING AGAINST ACCIDENTAL SHOT



20 NAILS MAGAZINE




CABLE CLAMPS

6706_POBD AŽ 6725_POBD

- clamps 6706_POBD to 6725_POBD designed to be used with suitable nails
- fire resistance 90 minutes
- certification according to DIN 4102-12

POWER 82J

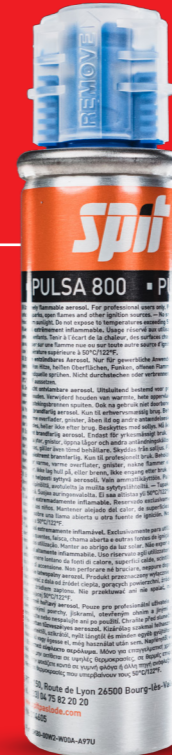

GAS CARTRIDGE

PLYN_PO

- capacity up to 750 shots
- for K-Pulsa 40 E_PO series nailgun
- supplied in a package with 500 pcs of nails
- Certification: 75/324/EC

GAS CARTRIDGE CAPACITY UP TO 750 SHOTS

BATTERY CAPACITY UP TO 3000 SHOTS

CHARGE TIME 90 MINUTES

ORDER HERE



www.kopos.com

