

item number: **PUK 38X150 S1_S**

thickness of metal sheet: 0,8 mm

product description: The floor trunking is used to connect the KUP 57 and KUP 80 floor boxes.

The SPUK floor channel coupling is used to connect the channels.




A PLUK interconnecting cable is suitable for ensuring conductive equipotential bonding, for which there are protrusions on the floor channel.

surface finish: Pre-galvanised

sales amount: á 2 m

certification: EN 50085-2-2

storage: EN 60721-3-1

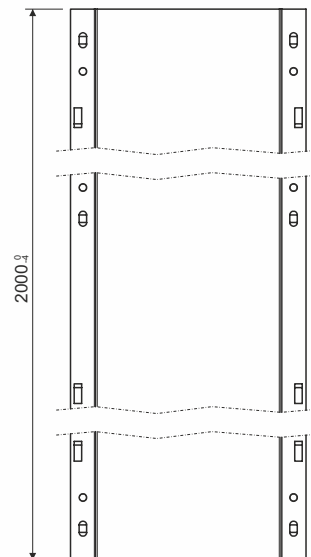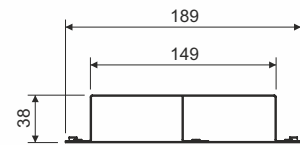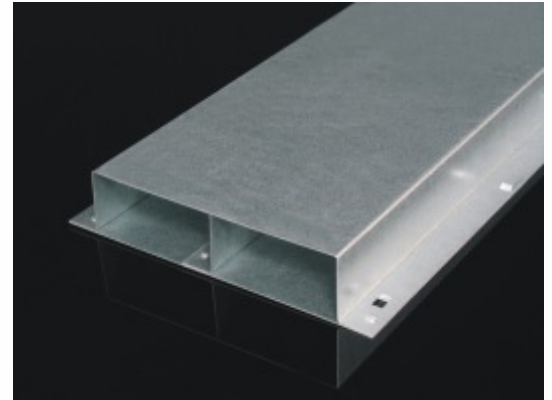

Inner usable cross-section of the trunking

floor trunking	cross-section mm ²	data cables		CYKY	CYKY	CYKY	CYKY
		Ø5,5	Ø7	3x1,5	5x1,5	3x2,5	5x2,5
PUK 38X150 S1_S	5700	94	58	39	28	32	23

The notes shape the quantity of cable with 100% fullness of trays. It is necessary to divide by 2 for each canals chamber.
 The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY.
 The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.

