




product description: Trunkings are supplied with cover.
 Optimal closing, fixed cover. Easy installation and removal.
 Rib can be easily broken out at the bottom of the trunking.

material: PVC - Pb-free, hard to inflame
 self-snuffing: yes, within 30 s
 temperature resistance - static: -20 - +60 °C
 temperature resistance - dynamic: -5 - +60 °C
 working temperature: >0 °C
 dielectric strength: >30 kV/mm
 fire class for underlying material: A1-F
 colour: RAL 7030 gray
 certification: EN 50085-1 ed.2:06, EN 50085-2-1:07
 storage: ČSN 64 0090



Perforation in three rows above the width of 75 mm.

Perforation in one row up to the width of 50 mm.

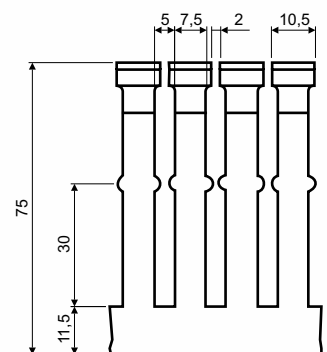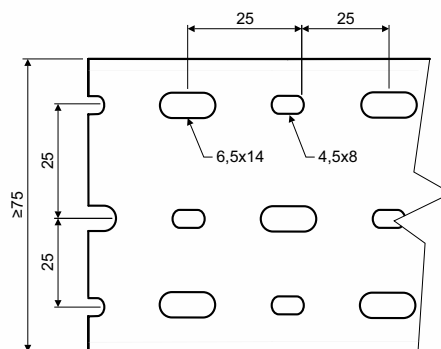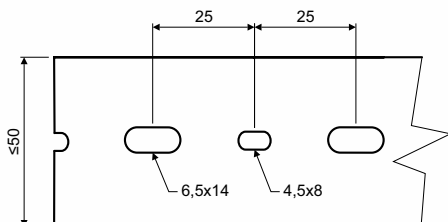

type number	outer width x height (mm)	inner width x height (mm)	length (m)	package (m)	number of conductors when 50% of the trunking capacity is filled		
					0,75 mm ² Ø2,8 mm	1 mm ² Ø2,9 mm	1,5 mm ² Ø3,2 mm
RK 25X25 DIN_LD	25 x 25	20 x 20	2	48	32	30	25
RK 37.5X37.5 DIN_LD	37,5 x 37,5	33 x 33	2	40	80	75	61
RK 50X50 DIN_LD	50 x 50	45 x 45	2	42	165	153	126
RK 75X50 DIN_LD	75 x 50	70 x 45	2	28	256	239	196
RK 25X75 DIN_LD	25 x 75	20 x 70	2	36	114	109	87
RK 37.5X75 DIN_LD	37,5 x 75	33 x 70	2	24	188	175	144
RK 50X75 DIN_LD	50 x 75	45 x 70	2	28	256	239	196
RK 75X75 DIN_LD	75 x 75	70 x 70	2	24	398	371	305
RK 100X75 DIN_LD	100 x 75	95 x 70	2	16	540	504	414
RK 125X75 DIN_LD	125 x 75	118 x 70	2	16	671	625	514