


item number	nominal thread	bolt length l	head height	head size
	diameter d		k	s
S 6X20_ZNCR	M6	20	4	10
S 6X30_ZNCR	M6	30	4	10
S 8X20_ZNCR	M8	20	5,3	13
S 8X20_GMT	M8	20	5,3	13
S 8X25_ZNCR	M8	25	5,3	13
S 8X30_ZNCR	M8	30	5,3	13
S 8X30_GMT	M8	30	5,3	13
S 8X40_ZNCR	M8	40	5,3	13
S 8X50_ZNCR	M8	50	5,3	13
S 8X70_ZNCR	M8	70	5,3	13
S 10X20_ZNCR	M10	20	6,4	17
S 10X20_GMT	M10	20	6,4	17
S 10X25_ZNCR	M10	25	6,4	17
S 10X30_ZNCR	M10	30	6,4	17
S 10X30_GMT	M10	30	6,4	17
S 10X40_ZNCR	M10	40	6,4	17
S 10X40_GMT	M10	40	6,4	17
S 10X50_ZNCR	M10	50	6,4	17
S 10X70_ZNCR	M10	70	6,4	17
S 10X70_GMT	M10	70	6,4	17
S 12X20_ZNCR	M12	20	7,5	19
S 12X25_ZNCR	M12	25	7,5	19
S 12X30_ZNCR	M12	30	7,5	19
S 12X40_ZNCR	M12	40	7,5	19
S 12X50_ZNCR	M12	50	7,5	19

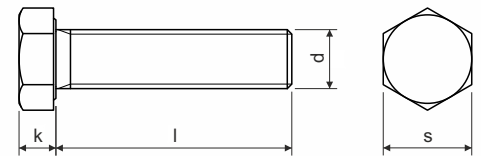

product description: hex head bolt with thread to the head

standard: DIN 933, ČSN EN ISO 4017

class: 8.8

surface finish: ZNCR - electrolytic galvanised
GMT - GEOMET

storage: EN 60721-3-1