




69dB

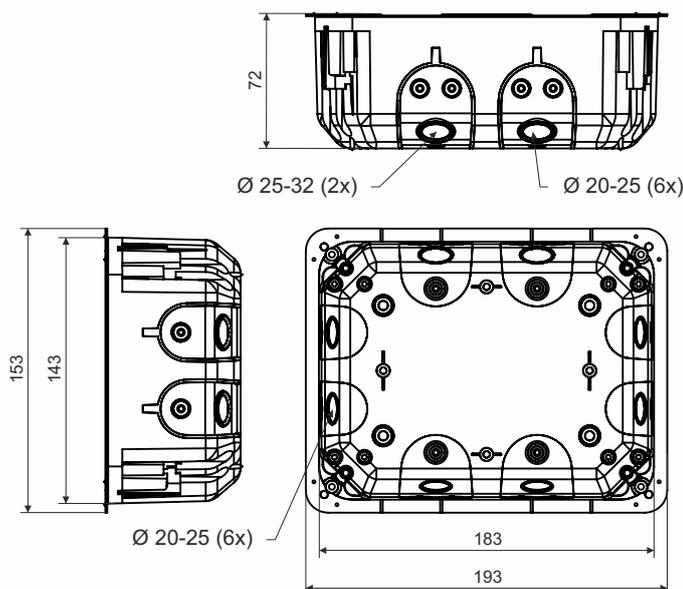

product description:

- designed for distribution system with voltage 500 V and with maximum current 16 A
- possibility to install the support trunking TS35
- outer side of the bottom contains holes for marking drill holes
- possibility of marking drill holes with protrusions on the edge of the box
- fitted mounting screws with plastic flange have a self-tapping double thread for quick installation
- flexible inlets holes
- labeled insputs for sealing cables and pipes in the flexible material (14x Ø6-10mm; 6x Ø20-25mm; 2x Ø25-32mm)
- air-tightness even with inserted cable or pipe
- suitable for low energy and passive houses
- prevents airflow through the installation
- not necessary to countersink the plasterboard edge when mounting
- suitable for soundproof walls with maximum soundproofing $R_w = 69\text{dB}$

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 305 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KO 180/LD_NA - already fitted with mounting screws and flange, stainless cover screws in the box, each box with a cover V 180 sealed in shrink foil and labelled; 20 pcs of boxes stacked in carton

accessories:

- terminal plate S-KSK 2
- screwless terminal plates TYP015, TYP016, TYP017, TYP018
- support trunking TS35

auxiliary tools:

- saw-drill VPT 40
- universal carrier VPTU