


item number	height (H) (mm)	for the height of cable ladder / tray (mm)	thickness of metal sheet (mm)	
S 35X200_S	25	35	1,2	
S 35X200_GMT				
S 60X200_S	50	60	1,5	🔥🔥
S 60X200_GMT				🔥🔥
S 60X200_ZM				🔥🔥
S 85X200_S	75	85	1,5	
S 85X200_GMT				
S 110X200_S	100	110	1,5	🔥
S 110X200_GMT				🔥

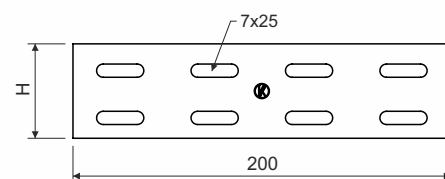

product description: The coupling is used to connect cable ladders or JUPITER cable trays without built-in connector.
Attached using NSM 6X10 screws, that meet the requirement for conductive bonding according ČSN EN 61537:02.
Coupling and bolt with a GMT surface finish is used for a tray with an F (ZM) surface finish.
These items can also be ordered in a varnished version

surface finish: S - Pre-Galvanized according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
GMT - non electrolytic plating, aluminum-zinc-layer 5-15 µm (equivalent Hot Dip Galvanized)
ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

- 🔥 products approved for standard constructions
- 🔥 products approved for non-standard constructions

storage: ČSN EN 60721-3-1

