


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	
VO 90X50_S					0,55	0,15	🔥🔥
VO 90X50_F	50	55	254	12	0,8	0,26	🔥🔥
VO 90X50_ZM					0,75	0,22	🔥🔥
VO 90X75_S		80			0,55	0,21	🔥🔥
VO 90X75_F	75		279	12	0,8	0,36	🔥🔥
VO 90X100_S					0,55	0,28	🔥🔥
VO 90X100_F	100	105	304	12	0,8	0,47	🔥🔥
VO 90X100_ZM					0,75	0,41	🔥🔥
VO 90X150_S		155			0,55	0,43	🔥🔥
VO 90X150_F	150		354	12	0,8	0,72	🔥🔥
VO 90X200_S					0,8	0,87	🔥🔥
VO 90X200_F	200	205	404	12	0,8	1,01	🔥🔥
VO 90X200_ZM					0,75	0,80	🔥🔥
VO 90X300_S						1,83	🔥🔥
VO 90X300_F	300	306	504	12	1,0	2,79	🔥🔥
VO 90X300_ZM						1,80	🔥🔥
VO 90X400_S						2,40	🔥🔥
VO 90X400_F	400	406	604	15	1,0	2,79	🔥🔥
VO 90X400_ZM						2,40	🔥🔥
VO 90X500_S						3,32	🔥
VO 90X500_F	500	506	704	15	1,0	3,85	🔥
VO 90X600_S						4,36	🔥
VO 90X600_F	600	606	804	15	1,0	5,06	🔥

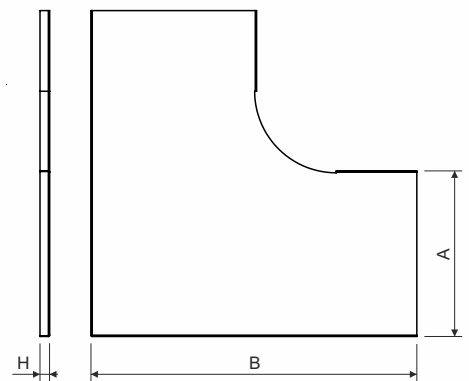

product description: This cover is used to cover the elbow 90°. To fix the cover use 6 pcs of cover fixtures VU. From the width of 400 mm the outer right angle of the side walls is replaced by skewed cut. These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
 🔥 products approved for standard constructions
 🔥 products approved for non-standard constructions

storage: ČSN EN 60721-3-1

