

item number	height (H) (mm)	for height of cable tray (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pcs)	
NS 50_S NS 50_ZM	47	50	1,00	0,04	2	🔥
NS 100_S NS 100_ZM	97	100	1,00	0,07	4	🔥




product description: The coupling is used to connect MARS cable trays.
 The connection is made by bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.
 ZM surface finish coupling shall be used for F surface finish trays.
 GMT surface finish bolts shall be used for F surface finish trays.
 These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm
 ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount: á 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.
 🔥 Product approved for non-standard constructions.

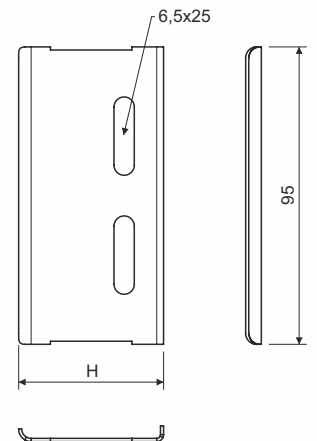

storage: ČSN EN 60721-3-1

