

type number	weight (kg/pc)	
DT OKO_POF	0,12	

product description: DT OKO are intended to use with bracket DT to create standardized supporting construction

To maintain functionality in fire as standardized supporting construction, the end of DT bracket has to be fixed by ZT into ceiling or wall. DT OKO is used for this function.

DT OKO + DT are full replacement for DTBS bracket

Package contains two bolts and nuts to fix DT OKO to DT brackets and one bolt to fix threaded rod that goes through DT OKO


surface finish: POF - Hot Dip Galvanized, zinc-layer 55 µm (min. 45 µm)

sales amount: á 1 pc

classification : ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: ČSN EN 60721-3-1

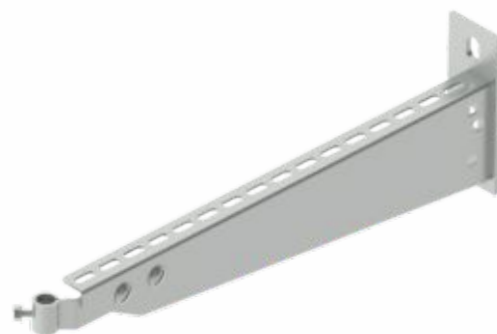

WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



DT OKO