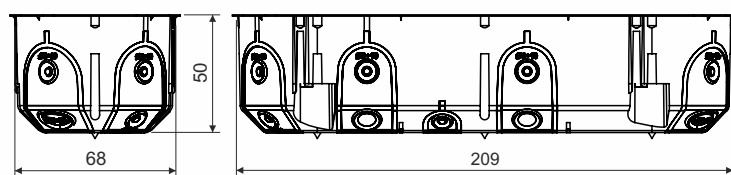


69dB


**product description:**

designed for distribution system with voltage 400 V and with maximum current 16 A  
 designed for mounting into hollow walls (eg. walls of plasterboard)  
 inlet openings made of flexible material  
 marked inputs for sealing pipes in the flexible material (4x Ø16-20 mm, 2x Ø20-25 mm, 12x Ø6-10 mm, 2x Ø6-9 mm)  
 air-tightness even with inserted cable or pipe  
 suitable for low energy and passive houses  
 prevents airflow through the installation  
 mounting screws with plastic foot are fitted with a twin self-tapping thread for quick installation  
 instrument screws are tightened below the edge of the box  
 extended edge situated for easy overlay installed device  
 when mounting, it is not necessary to countersink the plasterboard edge  
 mounting space in the box is divided partitions membrane  
 possibility to insert screwless terminals  
 suitable for soundproof walls with maximum soundproofing  $R_w = 69\text{dB}$

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 95 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

**KPL 64-50/3LD\_NA - boxes fitted with screws for mounting into double wall and device screws - package: 30 pcs of boxes loose in carton**
**accessories:** screwless terminal plates TYP015, TYP016, TYP017, TYP018

**auxiliary tools:** saw-drill VPT 64  
universal carrier VPTU



recycling codes:



box



feet



screws



carton

---

**Warning:**

Incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person.

Product damage - if the box is visibly damaged, stop using it.

Follow the manufacturer's installation instructions according to the installation instructions, videos.

Make sure the box is properly attached and secured to prevent accidental loosening.

Installing an unsuitable box can negatively affect the sound and thermal insulation of the room.

Under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers.