

type number	А	max. load (kg)	max. load - mounting with threaded rod (kg)	weight (kg/pc)
CTS 100_S	161	95	200	0,51
CTS 200_S	261	70	170	0,64
CTS 300_S	361	50	110	0,76

product description:

The hang clamp is used to suspend cable trays running through JUPITER cable trays or cable ladders from the ceiling. The clamp can be used separately or in combination with threaded rods (77.9, 77.10).

(ZT 8, ZT 10).

The cable tray is fastened using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish.

The clamp is fastened to the ceiling using KPO 10X95 anchors or KKZ 10 anchors, S 10X40 bolts and PD 10 washers.

To eliminate deformation during assembly the STS reinforcement is designated.

finish surface:

S - Pre-Galvanized, zinc-layer 15 - 27 μm


sales amount:


á 1 pc


storage:

EN 60721-3-1







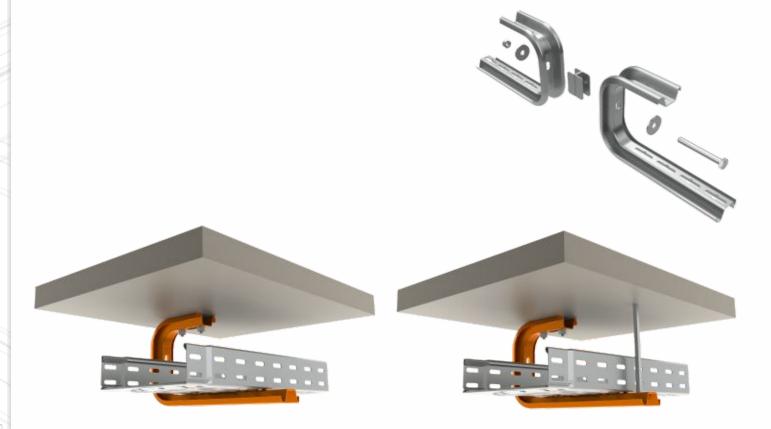



MARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Risk of system collapse

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



CTS