

type number	length (L) (mm)	weight (kg/pc)	max. load (F) (kg/pc)	🔥
<b>SPS 200_F</b>	200	0,86	166	🔥
<b>SPS 300_F</b>	300	1,12	110	🔥
<b>SPS 400_F</b>	400	1,37	82	🔥
<b>SPS 450_F</b>	450	1,50	73	🔥
<b>SPS 500_F</b>	500	1,62	66	🔥
<b>SPS 600_F</b>	600	1,88	54	🔥
<b>SPS 800_F</b>	750	2,25	40	🔥
<b>SPS 1000_F</b>	1000	2,89	28	🔥
<b>SPS 1200_F</b>	1200	3,39	18	🔥



OKSPS




**product description:** The ceiling profile is used as an element to create a supporting structure for a cable tray and to attach it to the ceiling or floor.

Designated for fastening of the brackets DS, DT and DTN with the use of sliding nut PM 41 M 10 and the bolt with a hexagonal head S 10X20. For double-sided mounting, the DT brackets are attached using S 10X70 bolts, M 10 nuts and PD 10 washers.

The ceiling profile can also be used as a support for cable trays on the wall or on the ceiling profile.

For safety purposes, the end of the profile may be fitted with an OKSPS protective cover.

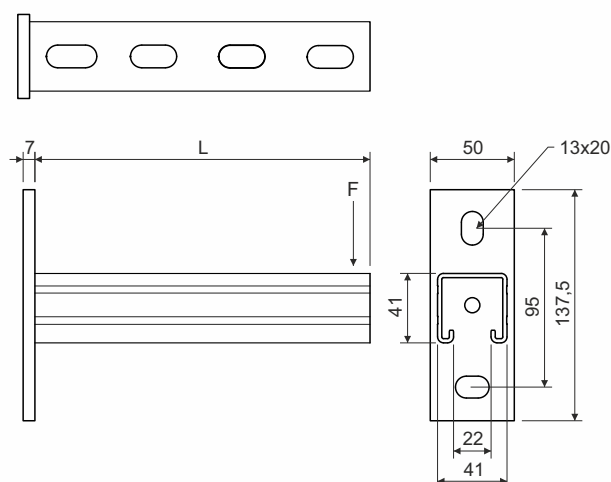


**surface finish:** F - suitable for indoor and outdoor installations (min. 1000 hours salt spray test according ISO 9227)

**sales amount:** 1 pc

**classification 🔥:** ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

**storage:** ČSN EN 60721-3-1

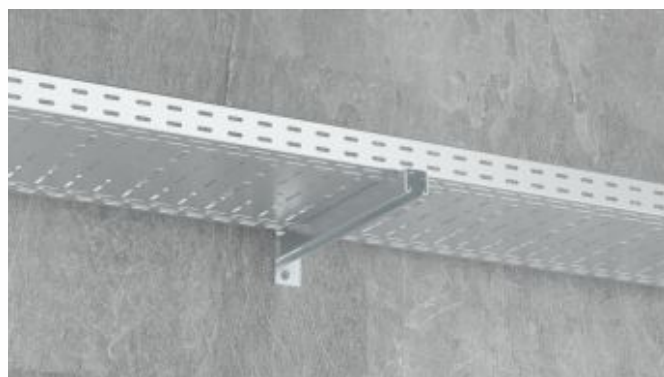

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



SPS