


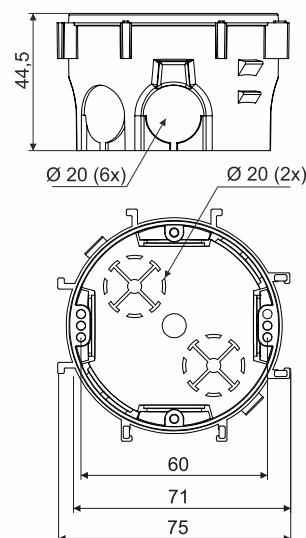

product  
description:

designed for distribution system with voltage 400 V and with maximum current 16 A  
vertical and horizontal connection with a spacing of 71 mm (up to 5 boxes)  
when using the DR18 spacers, boxes are suitable for devices with larger widths, such as Neo ....  
suitable for 2x double frame (Element)  
allows to install double-socket

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 31 g

meets the requirements: EN 60 670-1

storage: ČSN 64 0090

KP 67/3\_KA - device screws included in the package - package: 100 pcs loose in carton

accessories:

cover V 68  
compensating spacer DR18  
extending frames NR 68/6, NR 68/10  
screwless terminal plates TYP015, TYP016, TYP017, TYP018

recycling symbols:



box



cardboard



screws

 **WARNING**

risks associated  
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person  
follow the manufacturer's installation instructions according to the installation instructions and videos  
damage to the product - if the box is visibly damaged, stop using it  
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers