


type number	H (mm)	A (mm)	thickness of metal sheet (mm)	minimum amount of bolts for connection (pc)	weight (kg/pc)	🔥
BSKH 60 K_S	64	280	2,0	4	0,36	🔥
BSKH 60 K_F			2,0	4	0,41	🔥
BSKH 60 K_ZM			1,5	4	0,27	🔥
BSKH 85 K_S	89	280	2,0	6	0,45	
BSKH 85 K_F				6	0,53	
BSKH 110 K_S	114	280	2,0	8	0,55	🔥
BSKH 110 K_F			2,0	8	0,64	🔥
BSKH 110 K_ZM			1,5	8	0,41	🔥
BSKH 60 D_S	64	630	2,0	≥ 4	0,83	🔥
BSKH 60 D_F			2,0	≥ 4	0,96	🔥
BSKH 60 D_ZM			1,5	≥ 4	0,62	🔥
BSKH 85 D_S	89	630	2,0	≥ 6	1,05	
BSKH 85 D_F				≥ 6	1,22	
BSKH 110 D_S	114	630	2,0	≥ 8	1,28	🔥
BSKH 110 D_F			2,0	≥ 8	1,48	🔥
BSKH 110 D_ZM			1,5	≥ 8	0,96	🔥

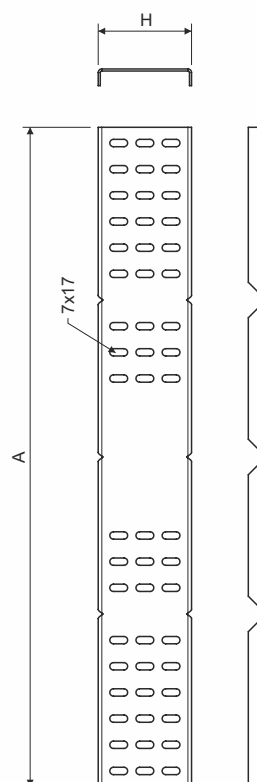

product description:

It is used for bending off of the cable ladder line or as a replacement of cable ladder adapting piece.

Couplings are a more cost-effective and versatile way of creating a tray branch in a horizontal direction.

Cut the side wall of the cable ladder to bend off c. 15 mm above the bottom – in the bottom perforation axis. It is necessary to use NCH.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with F and ZM surface finish.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 55 µm (min. 45 µm)

ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount:

1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage:

ČSN EN 60721-3-1



**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



horizontal side wall clamp



cardboard



stretch film