


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
NVKR 62_S	62	62	379	12	0,55	0,25	🔥
NVKR 62_F					0,6	0,33	🔥
NVKR 125_S	125	125	442	12	0,55	0,47	🔥
NVKR 125_F					0,8	0,61	🔥
NVKR 250_S	250	250	567	12	0,55	1,02	🔥
NVKR 250_F					0,8	1,72	🔥
NVKR 500_S	500	500	817	15	0,70	3,26	🔥
NVKR 500_F					0,8	4,40	🔥

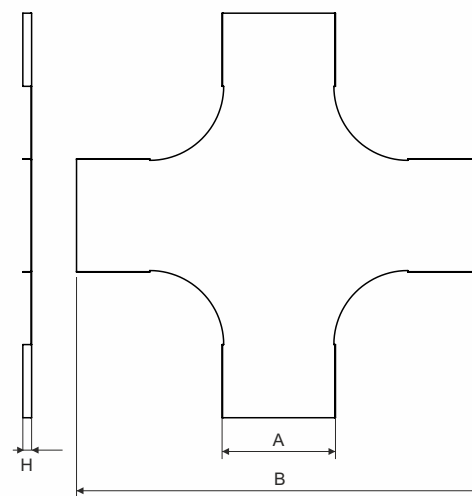

product description:

This cover is used to cover the cross-over.

To fix the cover use 6 pcs of cover fixtures VU or NUV.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 μm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 μm (min. 35 μm)

psales amount:

1 pc

meets the requirements:

ČSN EN 61537:02

classification 🔥:

ČSN 73 0895 P 90-R


DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage:

ČSN EN 60721-3-1

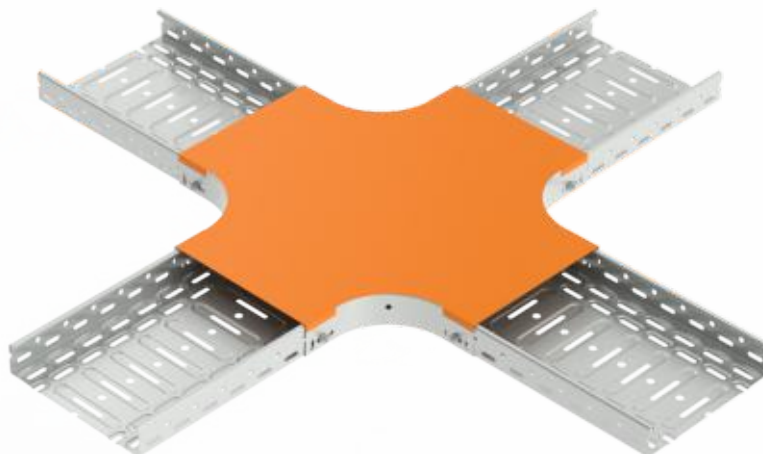

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NVKR